







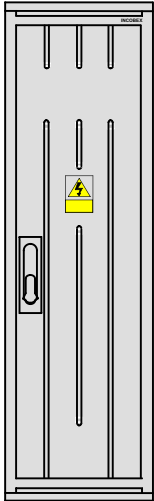
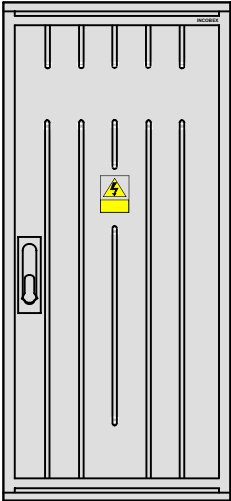
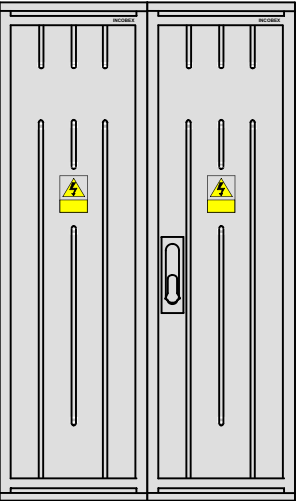
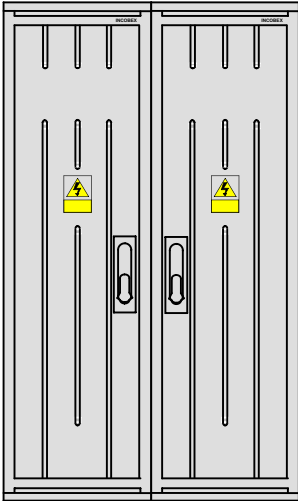


Obudowy termoutwardzalne typu ST o głębokości 250 mm

	260 mm	400 mm	530 mm	
440mm	ST0/44/1  Nr kat. 1.1 wym. tab 1	ST1/44/1  Nr kat. 1.4 wym. tab 1	ST2/44/1  Nr kat. 1.7 wym. tab 2	ST2/44/2  Nr kat. 1.8 wym. tab 3
570mm	ST0/57/1  Nr kat. 1.2 wym. tab 1	ST1/57/1  Nr kat. 1.5 wym. tab 1	ST2/57/1  Nr kat. 1.9 wym. tab 2	ST2/57/2  Nr kat. 1.10 wym. tab 3
880mm	ST0/88/1  Nr kat. 1.3* wym. tab 1	ST1/88/1  Nr kat. 1.6* wym. tab 1	ST2/88/1  Nr kat. 1.11* wym. tab 2	ST2/88/2  Nr kat. 1.12* wym. tab 3

* - w obudowach istnieją nadlewki gwintowane (izolatory) do montażu szyn prądowych